




MESH

OPTIMESH

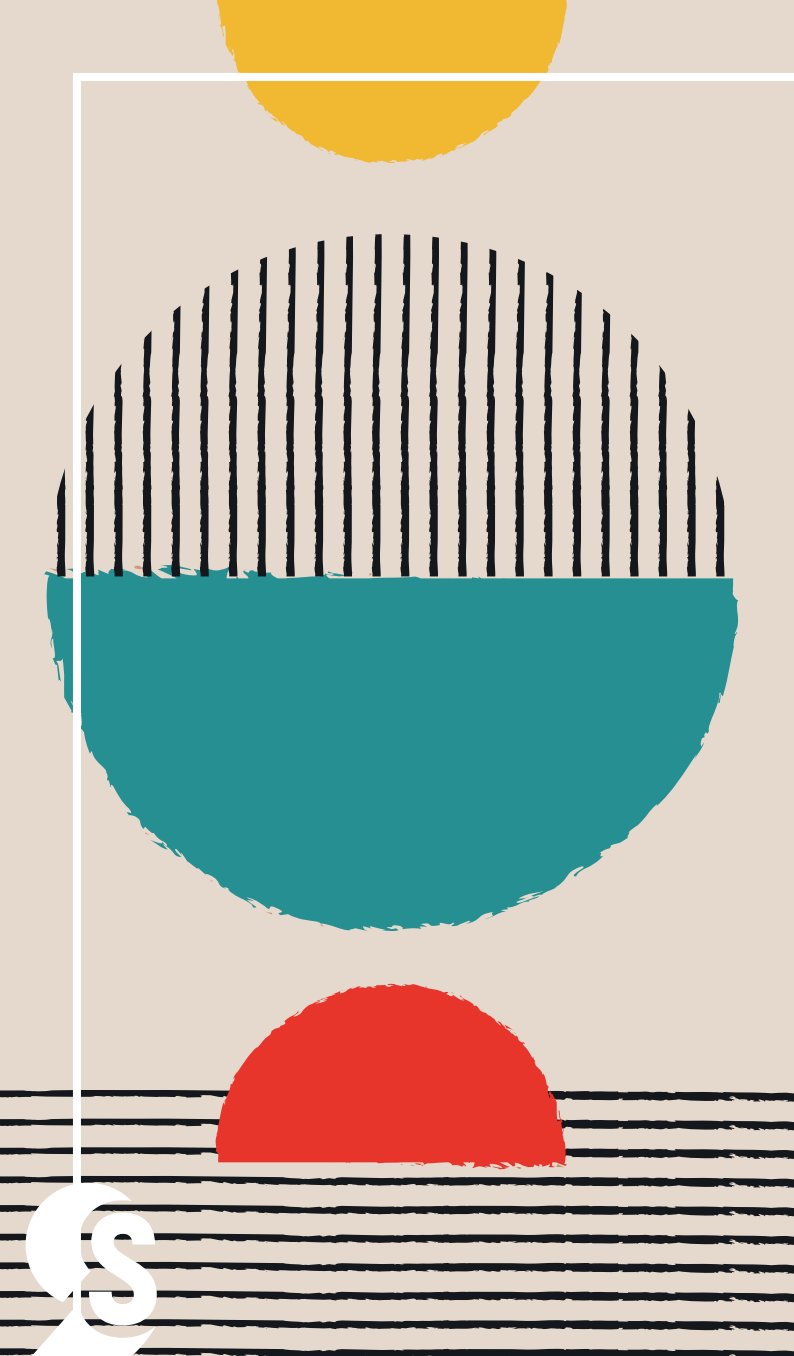

330 g/m²



FLAME
RETARDANT



IN / OUT

APPLICATIONS :

Habillage d'échafaudage, fond de vitrine
Scaffolding, window backdrop

[DE] ANWENDUNG :

Baugerüst-Banner, Schaufenstergestaltung

[ES] APLICACIONES :

Para cubrir edificios, fondos de escaparates

[IT] APPLICAZIONI :

Allest. decorativi impalcature, sfondo finestre



*Grille polyvalente avec une parfaite
stabilité dimensionnelle*

Versatile mesh with a perfect dimensional stability

Vielseitiges Mesh mit einer hervorragenden Formbeständigkeit

Malla versátil con una perfecta estabilidad dimensional

Maglia versatile con eccellente mantenimento della forma

OPTIMESH

Base cloth 1100 dTex PES HT
Support / Trärgewebe / Soporte / Supporto

Coating PVC
Enduction / Beschichtung / Revestimiento / Spalmatura

Finish Inkjet lacquer both side
Finition / Ausrüstung / Acabado / Finizione

Total weight 330 g/m²
Poids Total / Gesamtgewicht / Peso total / Peso totale

Thickness 0.45 mm
Epaisseur / Materialdicke / Espesor / Spessore

Tensile strength > NF EN ISO 1421 180 / 150 daN / 5cm
Résistance rupture / Reißfestigkeit / Resistencia a la rotura / Resistenza alla rottura

Tear strength > DIN 53363 35 / 35 daN
Résistance déchirure / Weiterreißfestigkeit / Resistencia al desgarro / Resistenza allo strappo

Adhesion > NF EN ISO 2411 6 daN / 5 cm
Adhérence / Haftung / Adherencia / Aderenza


Openess factor 20%
Taux d'ouverture / Offen-Faktor / Indice de apertura / Coefficiente di apertura

Temperature resistance > NF EN 1876-2 -30°C
Températures d'utilisation / Temperaturbeständigkeit / Resistencia máxima a la temperatura / Resistenza alla temperatura
+70°C (24h)

Flame Retardancy > NF P 92503 / DIN 4102 / BS 7837 M1
Ignifugation / Brennverhalten / Ignifugación / Ignifugazione B1 (in progress)
BS



Super Wide Format	3.20 m	60 lm
-------------------	--------	-------

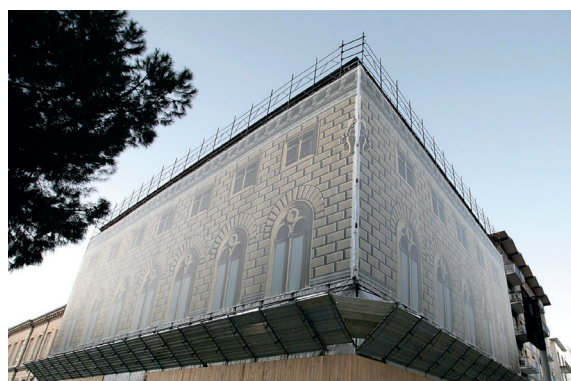

Average values. The buyer of our products is responsible for checking the validity of the above data, on the latest data sheet available at www.saintclairtextiles.com



SCTX.FR/OPTIM

SYSTEM LOWICK

FINITION SOLVENT FREE
CLEANGARD AQX

MADE IN FRANCE

REACH COMPLIANCE

vinyl
COMMITTED TO SUSTAINABLE DEVELOPMENT

Beyond technical textiles

SAINT CLAIR TEXTILES
www.saintclairtextiles.com

